

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number
WO 02/19735 A1

(51) International Patent Classification⁷: **H04Q 3/62**,
H04M 3/42

(74) Agent: **DEGUELLE, Wilhelmus, H., G.**; Internationaal
Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eind-
hoven (NL).

(21) International Application Number: PCT/EP01/09503

(81) Designated State (*national*): JP.

(22) International Filing Date: 17 August 2001 (17.08.2001)

(25) Filing Language: English

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(26) Publication Language: English

(30) Priority Data:
00203011.2 29 August 2000 (29.08.2000) EP

Published:


- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(71) Applicant: **KONINKLIJKE PHILIPS ELECTRON-
ICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA
Eindhoven (NL).

(72) Inventor: **VAN DEN BERG, Gerardus, V., J.**; Prof. Hol-
stlaan 6, NL-5656 AA Eindhoven (NL).

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: COMMUNICATION SYSTEM PROVIDING REMOTE USERS WITH FACILITIES

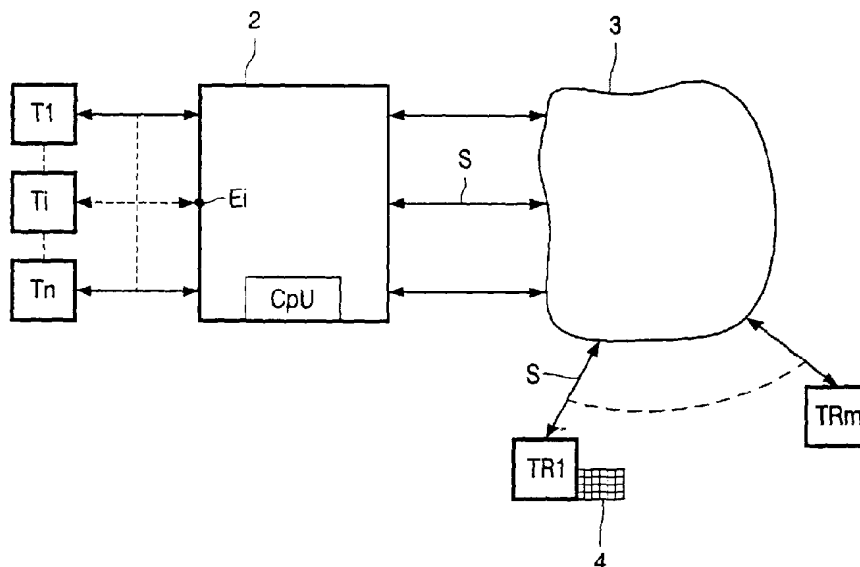

(57) **Abstract:** A communication system (1) for example a voice and/or data system, has at least one user terminal (T1 ... Tn), a facility providing processing device (2) coupled thereto for connecting the user terminals (T1 ... Tn), and an intervening network (3) for interconnection of the processing device (2) and a remote user terminal (RT1 ... RTm). The intervening network (3) is arranged for conveying at least facility related signals (S), and the processing device (2) is equipped for allowing its facilities to be used by the remote user terminal (RT1 ... RTm). An appropriate signalling protocol, such as with DTMF tones can be used to communicate the facility related signals (S) through the intervening network (3), between the processing device (2) and the remote user terminal (RT1 ... RTm).

WO 02/19735 A1

Communication system providing remote users with facilities

The present invention relates to a communication system for example a voice and/or data system, having at least one user terminal, a facility providing processing device coupled thereto for connecting the user terminals, and an intervening network for interconnection of the processing device and a remote user terminal.

5 The present invention also concerns in particular a telephone system comprising such a communication system.

Such a communication device is known from WO 97/18662. The system
10 known therefrom has a plurality of computer user terminals which are coupled to a switching device which provides a virtual presence facility. An intervening public switched telephone network is interconnected between the switching device and a possibly remote access user terminal. The known system simulates -in a virtual presence server- to a co-worker or external party the virtual presence of a user at the premises of an corporate office, where the
15 switching device is situated, in particular if the user is not present at the office. The virtual presence server also performs call management functions. There is however a variety of additional other facilities and functions which are not at the disposal of a remote user.

20 Therefore it is an object of the present invention to provide an improved communication system or telephone system, which is capable of offering these additional facilities to in particular remote users in the communication system.

 Thereto the communication system according to the present invention is characterised in that the intervening network is arranged for conveying at least facility related
25 signals, and that the processing device is equipped for allowing its facilities to be used by the remote user terminal.

It is an advantage of the communication system according to the present invention that the either or not remote user terminals may be equipped with generally known and state of the art hardware and/or software. Despite thereof interaction of the user terminals

with all kinds of intervening networks is possible, while use of the facilities provided by the processing device can now also be made by in particular a remote user, as long as the intervening network is arranged for conveying facility related signals which are necessary for performing the facilities concerned. Examples of such intervening networks are: GSM-like
5 networks, glass fiber networks, cable or wire networks, such as CAI networks, INTERNET, etcetera. Advantageously selectable facilities are also available to an external party, in particular the remote user when connected to the facility providing processing device only, that is wherein no connection to another user terminal has yet been made.

10 An embodiment of the communication system according to the invention is characterised in that the communication system is arranged for processing facility related signals during an active connection between the remote user terminal and another user terminal.

It is an advantage of this embodiment of the communication system according to the present invention that even during an active connection between the remote user
15 terminal and any other user terminal, at least a remote user is capable of operating and/or calling those facilities or features which he or she desires to make use of at that particular moment during an ongoing call. This provides an extra service to the remote user during the call.

Another embodiment of the communication system according to the invention
20 is characterised in that the intervening network supports a signalling protocol for conveying the facility related signals.

In a preferred embodiment the communication system according to the invention is characterised in that the facility providing processing device is arranged to have the facilities implemented by software and/or hardware.

25 Particularly the software implementation allows a advantageous flexibility and programmability of wanted facilities, without hardware burden.

Apart from measuring signals, operating signals and possible statistical signals, which are related to the facilities in a still further embodiment of the communication system according to the invention at least part of the facility related signals is arranged to
30 select facilities requested by the remote user terminal.

An easy to implement embodiment of the communication system according to the invention is characterised in that either voice-like signals, e.g. DTMF control signals, FSK signals and the like, and/or end-to-end signals, e.g. user-to-user signalling are used for enabling the facilities of the processing device to the remote user terminal.

Advantageously a wide variety of general or more specific features may at wish be implemented in the communication system according to the invention, such as generic extension features, e.g. break-in feature, automatic ring back feature, follow me feature, shuttle feature, call forwarding; digital extension features, such as ISDN and data communication features; cordless extension features; group features; manager/secretary features; operator features; day and night service features; trunk features, e.g. generic trunk features, ISDN trunk features, and routing features; paging features; telephony and maintenance features; and any features upgradable and/or downloadable during operation of the communication system.

A practical embodiment of the communication system according to the invention is characterised in that the processing device and/or the user terminal concerned comprises a voice signal transmitter and/or receiver, for example a DTMF transmitter/receiver.

At present the communication system according to the invention will be elucidated further together with its additional advantages while reference is being made to the appended drawing. In the drawing the sole Fig. shows a general outline of a possible embodiment of the communication system according to the present invention.

The fig. shows a communication system 1, which may be a voice and/or data communication system, such as a telephone system, either wired or cabled, or acting through RF or microwave transmitters and/or receivers, or satellites. Generally voice signals and data signals, apart from related control signals will be communicated throughout the system 1. The communication system 1 has at least one facility providing processing device 2, which is coupled to one or more user terminals T1 ... Tn and has one or more so called remote user terminals RT1 ... RTm, which are coupled to the processing device 2 through at least an intervening network 3. A user terminal Ti of the user terminals T1 ... Tn enters the processing device 2 at a fixed entry Ei. The facility providing processing device 2 is capable of making a telephone and/or data connection to any other of the user terminals, and if the other user terminal also enters the processing device 2 at another fixed entry or vice versa, than generally all relevant features or facilities provided by the facility providing processing device are available at both user terminals. However in general a remote user terminal, whose

connection through the intervening network 3 to the processing device 2 is made at an entry which is not fixed but depends on a designation by the device 2, will not have these features at his remote disposal.

Examples of the facilities and features meant here are: generic extension
5 features, such as abbreviated dialling -on individual basis or on basis of use, group, or common pool-, conferencing features, break-in features, automatic ring back features -on busy, on next use (that is at return)- follow me features, shuttle features, call forwarding, do not disturb, hot-line, selective diversions, secret calls. Further features are for example: extension dialling features, password protected dialling, cost centre dialling, direct dialling
10 out, (delayed) dialling out, last external number dialling, secret call dialling, extension ringing features, twinning (that is the call is routed to two destinations, when both are free), multiple ring group, call pick-up, queuing of incoming calls, three party features, add-on conference feature, multi-party conferencing features (more than three parties), diversion features -unconditional, on busy, on don't answer, on absent, on not reachable, on initiator,
15 on basis of do not disturb-. Just by way of non limiting example the automatic ring back features will be elucidated further, as to include automatic ring back (ARB): on busy, on next use (that is at return) cancel ARB, multiple ARB, ARB protected, ARB after diversion(s). Also mentioned here -as far as applicable- are for example digital extension features, such as ISDN and data communication features; cordless extension features; group features;
20 manager/secretary features; operator features; day and night service features; trunk features, e.g. generic trunk features, ISDN trunk features, and routing features; paging features; telephony and maintenance features. These features can at wish be upgraded and/or downloaded during operation of the communication system 1 from for example the processing device 2, the intervening network 3, or can be upgraded and/or downloaded from
25 for example the INTERNET or from any data carrier source, such as compact disk available. Although the features may be implemented by software and/or hardware, the former will be preferred because of the flexibility and programmability provided thereby.

The intervening network 3, which may for example be a GSM-like network, glass fiber network, cable or wire network, such as CAI network, INTERNET or the like is
30 typically arranged for conveying at least signals which are related to the mentioned facilities. In addition the processing device 2 is equipped for allowing its facilities to be used by at least any of the remote user terminal TR1 ... TRm. If the remote user terminal is now actually connected to the processing device 2 through the one or more intervening networks 3 certain features may be called and actuated by the remote user. The same holds if the remote user

terminal is actually connected in generally a telephone and/or data call to any other user terminal or remote terminal. Some appropriate connect signalling protocol for conveying the correspondingly facility related signals S to and from the remote user and processing device 2 may at wish be used.

5 In practice at least part of the facility related signals S is arranged to select facilities requested by the remote user terminal in the signalling protocol.

 The signalling protocol uses signals which may be voice-like signals, e.g. DTMF control signals, FSK signals and the like, and/or end-to-end signals, e.g. user-to-user signalling for enabling the facilities of the processing device 2 to the remote user terminal
10 TR1 ... TRm. The processing device 2 and/or the user terminal T1 ... Tn concerned comprises a voice signal transmitter and/or receiver, for example a DTMF transmitter/receiver 4. Such a transmitter and/or receiver is already present in nowadays telephone devices and is advantageously also given a very useful function in relation to the above mentioned facilities and features, which the remote user terminal RT1 ... RTm has now at its disposal. A
15 transmitter alone is already used for listening to voice mails, and/or for ordering products. The facilities can be enabled by the remote user in case the remote user is only connected to the processing device 2, but can even be enabled in cases wherein the remote user is actually connected in a call with some other user terminal.

 Whilst the above has been described with reference to essentially preferred
20 embodiments and best possible modes it will be understood that these embodiments are by no means to be construed as limiting examples of the devices concerned, because various modifications, features and combination of features falling within the scope of the appended claims are now within reach of the skilled person.

CLAIMS:

1. A communication system (1) for example a voice and/or data system, having at least one user terminal (T1 ... Tn), a facility providing processing device (2) coupled thereto for connecting the user terminals (T1 ... Tn), and an intervening network (3) for interconnection of the processing device (2) and a remote user terminal (RT1 ... RTm),
5 characterised in that the intervening network (3) is arranged for conveying at least facility related signals (S), and that the processing device (2) is equipped for allowing its facilities to be used by the remote user terminal (RT1 ... RTm).

2. The communication system (1) according to claim 1, characterised in that the
10 communication system (1) is arranged for processing facility related signals (S) during an active connection between the remote user terminal (RT1 ... RTm) and another user terminal (T1 ... Tn; RT1 ... RTm).

3. The communication system (1) according to claims 1 or 2, characterised in
15 that the intervening network (3) supports a signalling protocol for conveying the facility related signals (S).

4. The communication system (1) according to one of the claims 1-3,
characterised in that the facility providing processing device (2) is arranged to have the
20 facilities implemented by software and/or hardware.

5. The communication system (1) according to one of the claims 1-4,
characterised in that at least part of the facility related signals (S) is arranged to select
facilities requested by the remote user terminal (RT1 ... RTm).


25

6. The communication system (1) according to one of the claims 1-5,
characterised in that either voice-like signals, e.g. DTMF control signals, FSK signals and the like, and/or end-to-end signals, e.g. user-to-user signalling are used for enabling the facilities of the processing device (2) to the remote user terminal (RT1 ...RTm).

7. The communication system (1) according to one of the claims 1-6, characterised in that the facilities may comprise one or more of the following features: generic extension features, e.g. break-in feature, automatic ring back feature, follow me feature, shuttle feature, call forwarding; digital extension features, such as ISDN and data communication features; cordless extension features; group features; manager/secretary features; operator features; day and night service features; trunk features, e.g. generic trunk features, ISDN trunk features, and routing features; paging features; telephony and maintenance features; and any features upgradable and/or downloadable during operation of the communication system (1).

8. The communication system (1) according to one of the claims 1-7, characterised in that the processing device (2) and/or the user terminal (T1 ... Tn) concerned comprises a voice signal transmitter and/or receiver, for example a DTMF transmitter/receiver (4).

9. Telephone system comprising a communication system (1) according to one of the claims 1-8, the communication system (1) having at least one user terminal (T1 ... Tn) , a facility providing processing device (2) coupled thereto for connecting the user terminals (T1 ... Tn), and an intervening network (3) for interconnection of the processing device (2) and a remote user terminal (RT1 ... RTm), characterised in that the intervening network (3) is arranged for conveying at least facility related signals (S), and that the processing device (2) is equipped for allowing its facilities to be used by the remote user terminal (RT1 ... RTm).

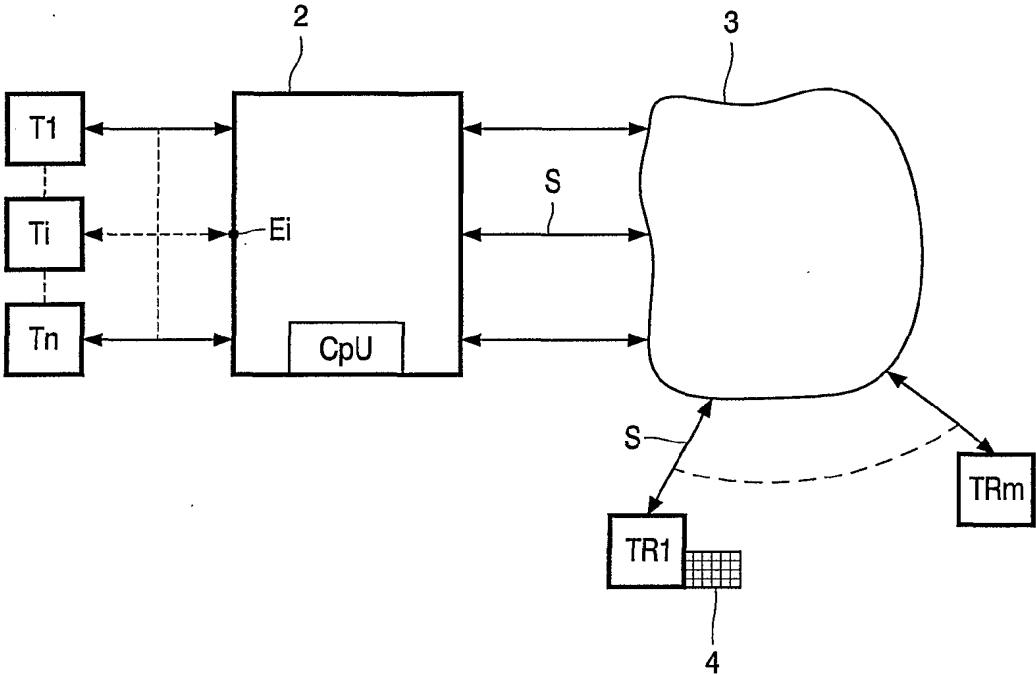

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/09503

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q3/62 H04M3/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 859 855 A (MUELLER H) 12 January 1999 (1999-01-12) column 1, line 65 -column 2, line 59 column 3, line 64 -column 4, line 4 column 5, line 1-20 ----	1-9
X	GB 2 287 610 A (MOLLER C H) 20 September 1995 (1995-09-20) the whole document ----	1-9
X	EP 0 939 536 A (SIEMENS AG) 1 September 1999 (1999-09-01) paragraphs '0004!-'0011! paragraphs '0029!', '0030! paragraph '0033! ----- -/--	1-9

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- 'A' document defining the general state of the art which is not considered to be of particular relevance
- 'E' earlier document but published on or after the international filing date
- 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O' document referring to an oral disclosure, use, exhibition or other means
- 'P' document published prior to the international filing date but later than the priority date claimed

- 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- '&' document member of the same patent family

Date of the actual completion of the international search

21 January 2002

Date of mailing of the international search report

25/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Barbelanne, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/09503

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>EP 0 939 537 A (SIEMENS AG) 1 September 1999 (1999-09-01) paragraphs '0002!-'0006! -----</p>	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/09503

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5859855	A	12-01-1999	DE	19527806 C1	02-01-1997
			CN	1146109 A	26-03-1997
			EP	0756429 A2	29-01-1997
GB 2287610	A	20-09-1995	NONE		
EP 0939536	A	01-09-1999	DE	19808369 A1	09-09-1999
			EP	0939536 A2	01-09-1999
EP 0939537	A	01-09-1999	DE	19808368 A1	09-09-1999
			EP	0939537 A2	01-09-1999